

KP-BAT

125 lm/W




KP-BAT-30-200






KP-BAT-60-200




Technical drawings (mm)

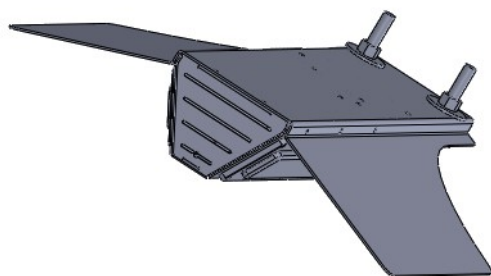

KP-BAT-30-200

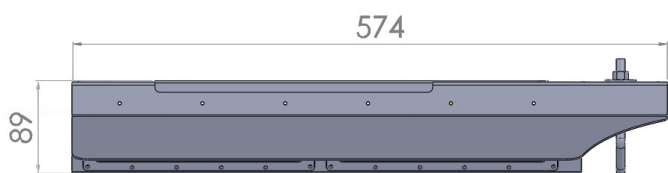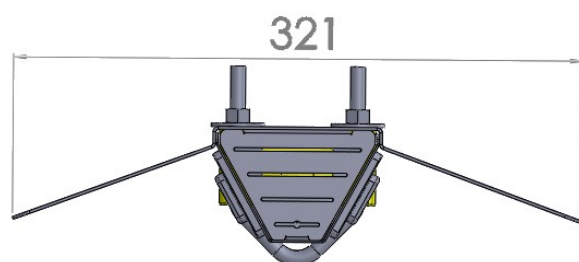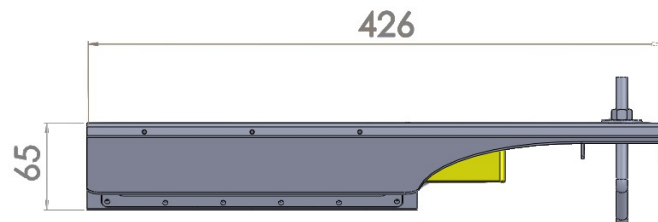

KP-BAT-60-200

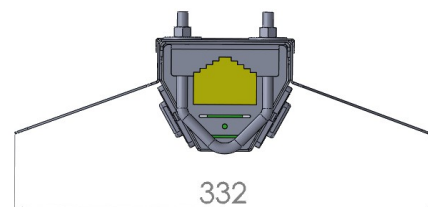


Basic parameters

Version	Power	Lumen output	Type	Lamp dimension (length x width x height)[mm]	Net weight [kg]
20-200	19 W	2 375 lm	Outdoor	426 x 321 x 65	2
30-200	35 W	4 375 lm		426 x 321 x 65	2
60-200	65 W	8 125 lm		574 x 332 x 89	4
90-200	95 W	11 875 lm		809 x 332 x 90	5

- Power and lumen output of lamp may hesitate +/- 5% from the table above
- KP-BAT with different power is possible and we consider each case individually

Specification

Input voltage		AC 220 ÷ 240V
Appliance classes		I
Working temperature		-30°C ÷ 35°C
Color rendering index (CRI)		Ra>80
Life time		> 50 000 hours
Color temperature		5000K 4000K other to order
Material	Structure	aluminium build
	Finish	anodized
LED Vender		Samsung
side-entry mounting diameter [mm]		Ø60

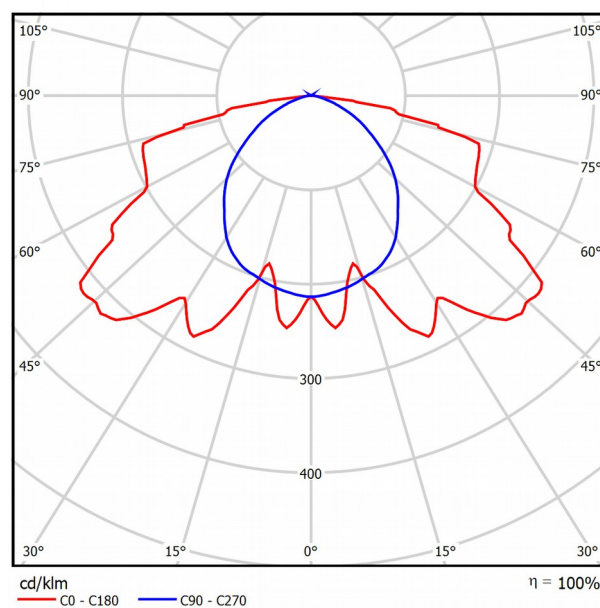

light distribution curve