




KP-BELKA


145 lm/W

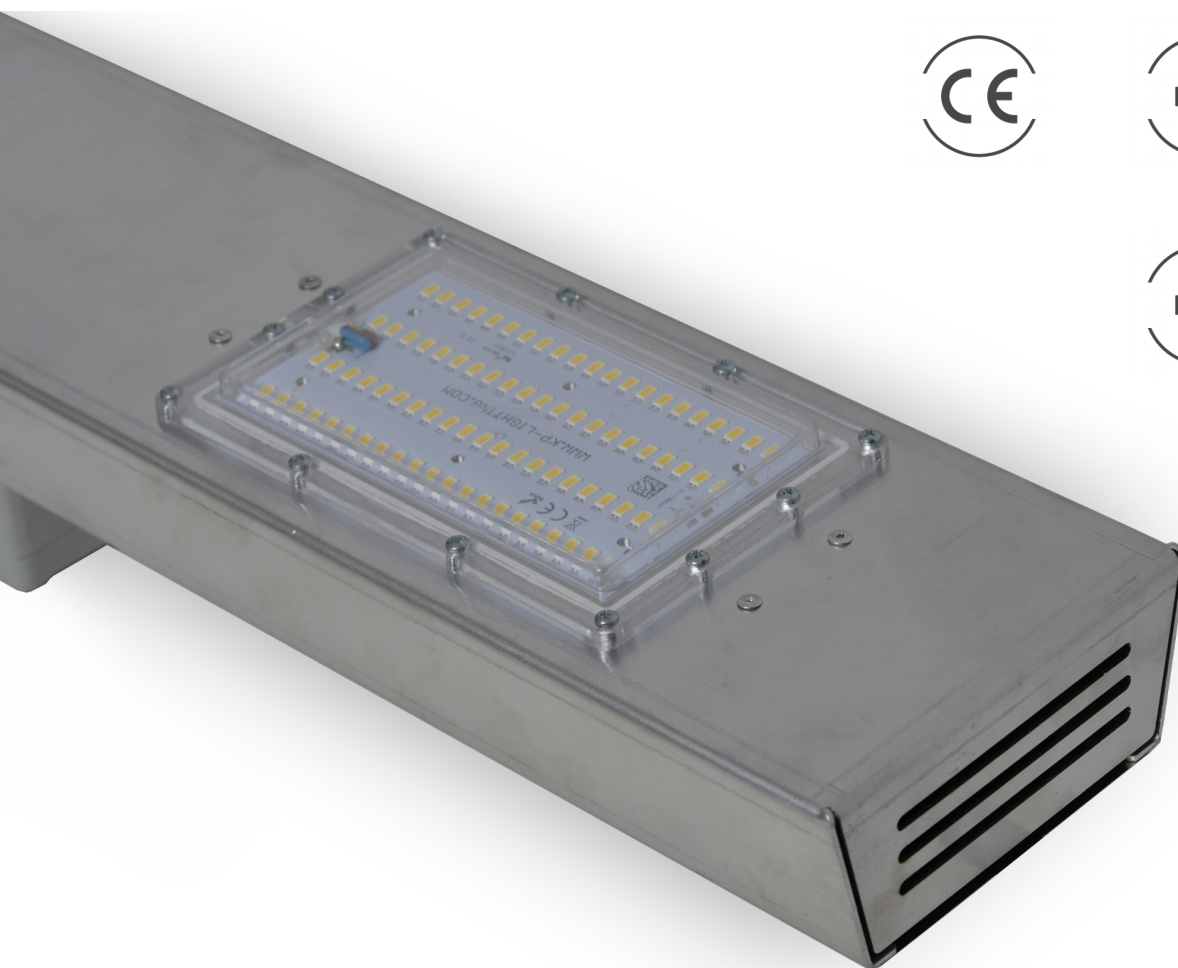

Technical drawings (mm)


KP-BELKA-60-200

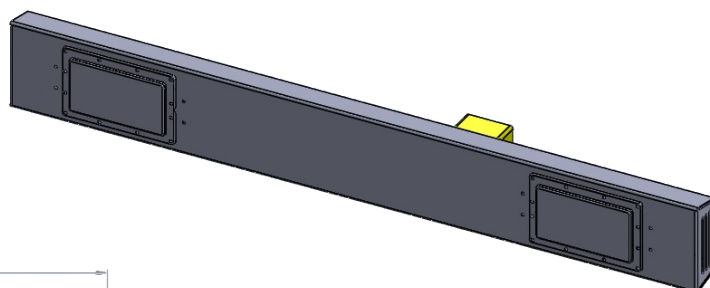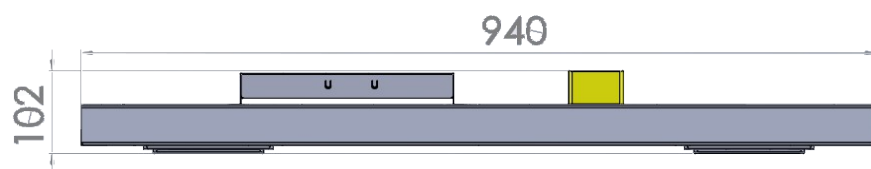

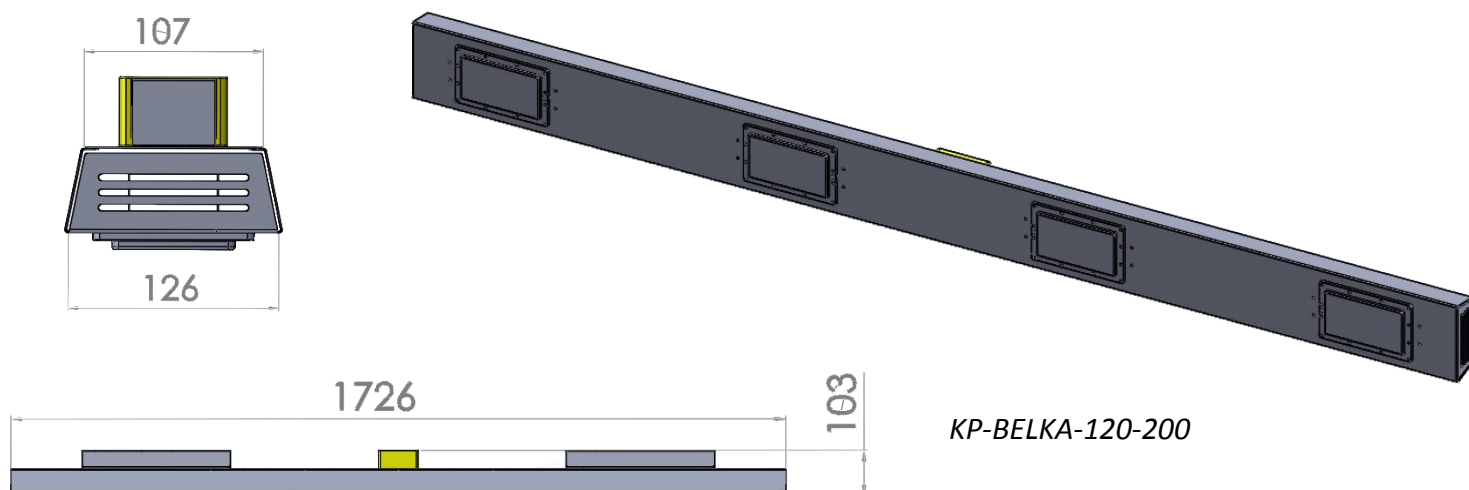

KP-BELKA-120-200

Fixing

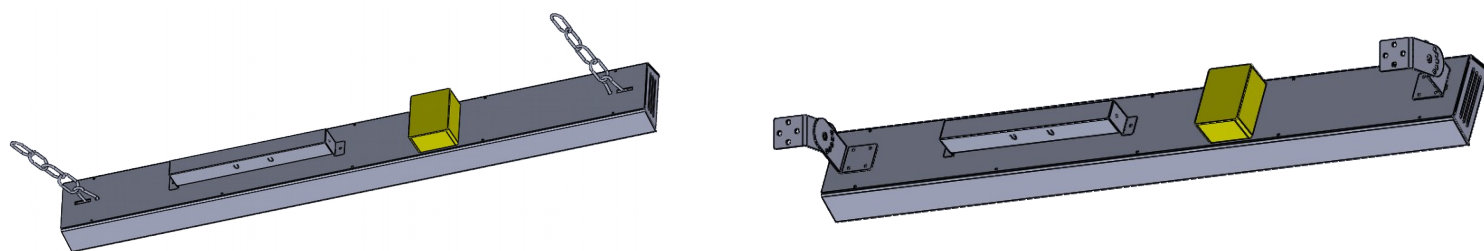

The fixing of the lamp can be individually adjust




Basic parameters

Version	Power	Lumen output	Type	Lamp dimension (length x width x height)[mm]	Net weight [kg]
30-200	35 W	5 075 lm	Indoor / Outdoor	300 x 126 x 103	1,5
60-200	65 W	9 425 lm		940 x 126 x 103	2
90-200	95 W	13 775 lm		1200 x 126 x 103	2,3
130-200	125 W	18 125 lm		1726 x 126 x 103	2,7
160-200	163 W	23 635 lm		1800 x 126 x 103	3
200-200	198 W	28 710 lm		2200 x 126 x 103	3,5

- Power and lumen output of lamp may hesitate +/- 5% from the table above
- KP-BELKA with different power is possible and we consider each case individually

Specification

Input voltage		AC 220 ÷ 240V
Appliance classes		I
Working temperature		-20°C ÷ 35°C
Color rendering index (CRI)		Ra>80
Life time		> 50 000 hours
Color temperature		5000K 4000K other to order
Material	Structure	aluminium build
	Finish	can be anodized or varnished
LED Vender		Samsung

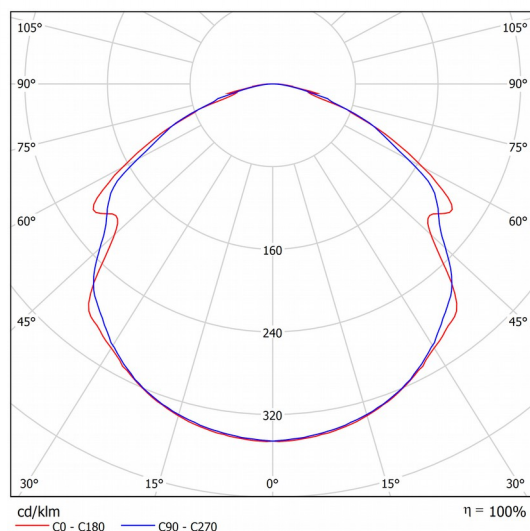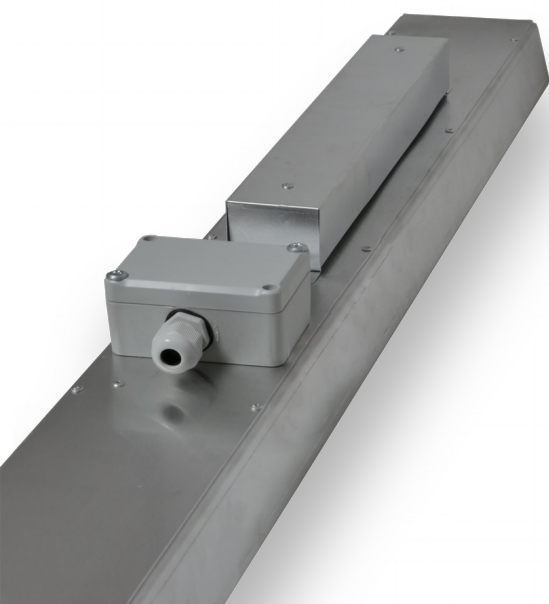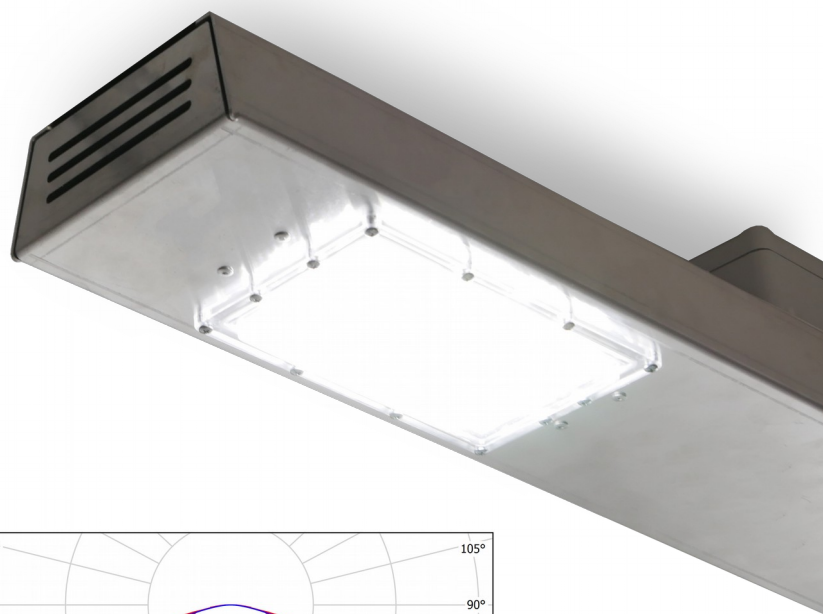

light distribution curve