



KP-BILLBOARD

135 lm/W

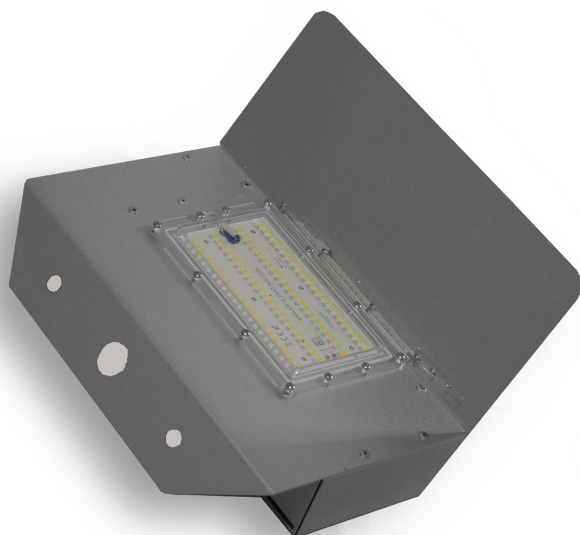

KP-BILLBOARD-30-200



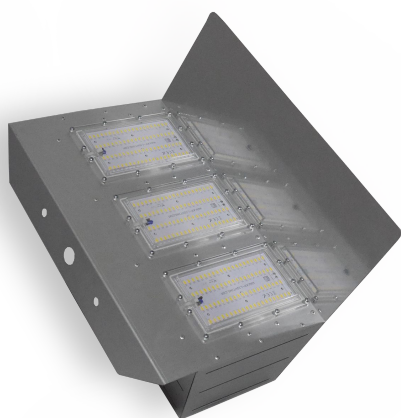


KP-BILLBOARD-90-200




KP-BILLBOARD-190-200



Technical drawings (mm)

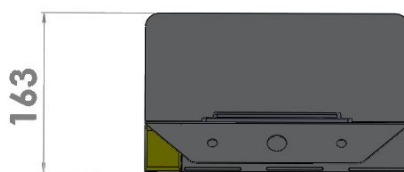


KP-BILLBOARD-30-200

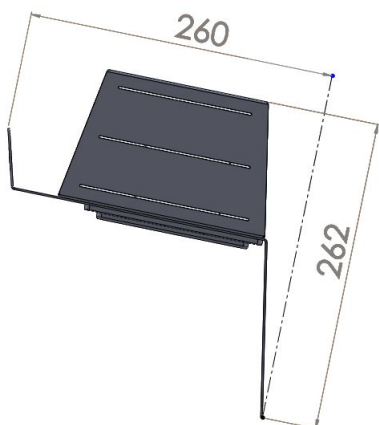


KP-BILLBOARD-90-200

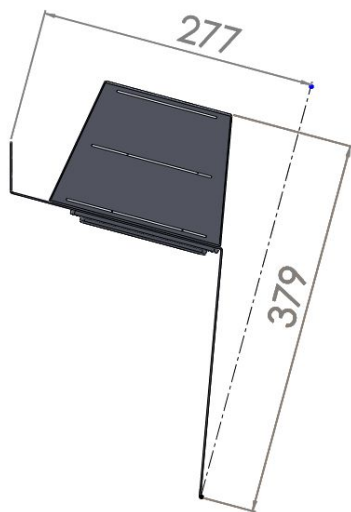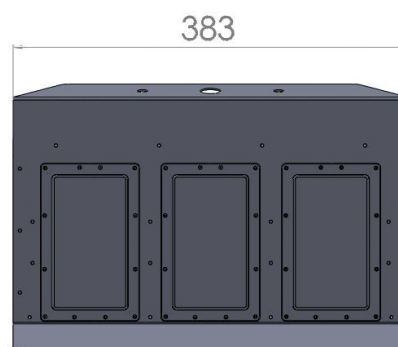


KP-BILLBOARD-120-200

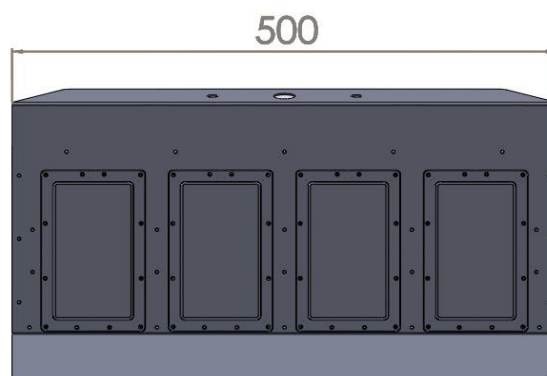

Fixing

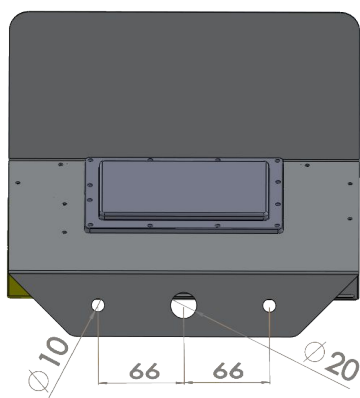

The fixing of the lamp can be individually adjust

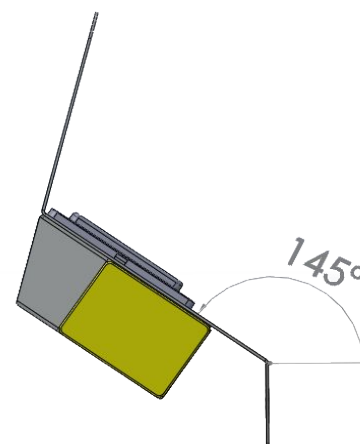

Basic parameters

Version	Power	Lumen output	Type	Lamp dimension (length x width x height)[mm]	Net weight [kg]
30-200	32 W	4 320 lm	Outdoor	270 x 248 x 163	1,2
60-200	63 W	8 505 lm		420 x 264 x 274	2
90-200	95 W	12 825 lm		383 x 260 x 262	2,3
120-200	122 W	16 470 lm		500 x 277 x 379	3
190-200	190 W	25 650 lm		734 x 324 x 380	4

- Power and lumen output of lamp may hesitate +/- 5% from the table above
- KP-BILLBOARD with different power is possible and we consider each case individually

Specification

Input voltage		AC 220 ÷ 240V
Appliance classes		I
Working temperature		-30°C ÷ 35°C
Color rendering index (CRI)		Ra>80
Color temperature		5000K 4000K other to order
Material	Structure	aluminium build
	Finish	anodized can be varnished
LED Vender		Samsung
Life time		> 50 000 hours

