

KP-CITY-A

139 lm/W



KP-CITY-A-30-200-socz-120x60

360° view





Basic parameters

| Name | Power | Lumen output | Type | Net weight [kg] |
|--------|-------|--------------|---------|-----------------|
| 20-200 | 17 W | 2 363 lm | Outdoor | 2,8 |
| 30-200 | 28 W | 3 892 lm | | 2,9 |
| 40-200 | 38 W | 5 282 lm | | 3 |
| 50-200 | 48 W | 6 672 lm | | 3,1 |

- Power and lumen output of lamp may hesitate +/- 5% from the table above
- KP-CITY-A with different power is possible and we consider each case individually

Version of KP-CITY-A is : **name-lens**

Heeling angle regulation

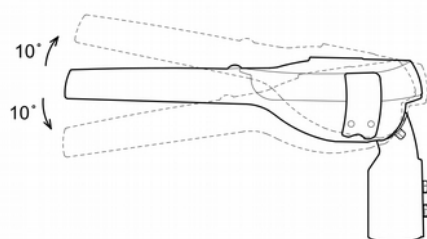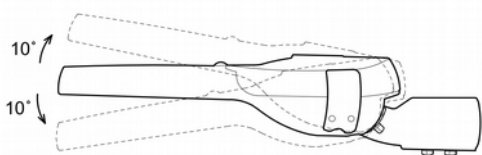


Specification

| | | |
|---|--------------------------------|----------------------|
| Input voltage | AC 220 ÷ 240V | |
| Appliance classes | I | |
| Working temperature | -30°C ÷ +35°C | |
| Color rendering index (CRI) | Ra>70 | |
| Color temperature | 5000K 4000K other to order | |
| Life time | > 50 000 hours | |
| Material | Structure | aluminum die-casting |
| | Finish | anodized |
| | Front glass | tempered glass |
| Color | graphite | |
| LED Vender | Seoul Semiconductor | |
| Lamp dimension (length x width x height)[mm] | 440 x 200 x 100 | |
| Lamp mount dimension (length x diameter)[mm] | 100 x 65 | |
| side-entry mounting diameter [mm] | Ø50 | |


Maintenance

- replaceable power supplier in the lamp


Lenses

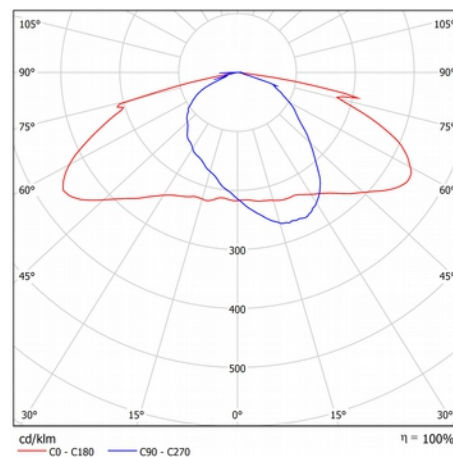


lens: socz-120x60

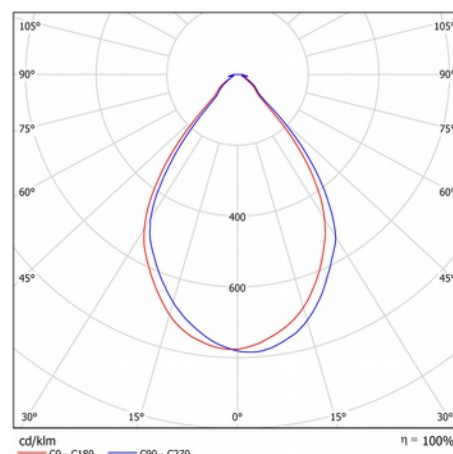

lens: socz-60x60

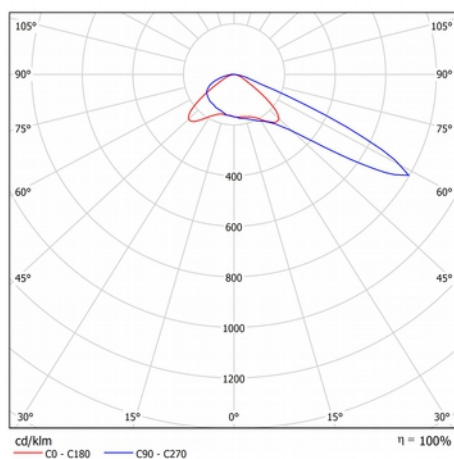

lens: socz-DAL

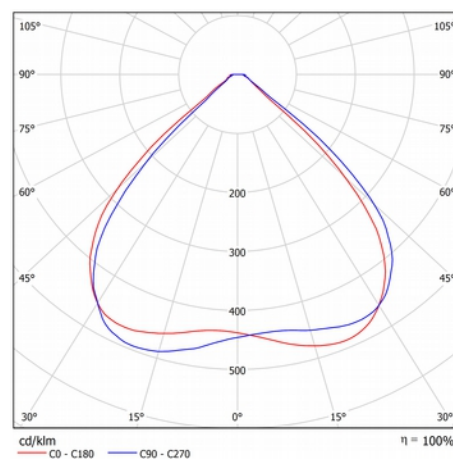

lens: socz-90x90

Version of KP-CITY-A is :
name-lens