

KP-CITY B

139 lm/W



KP-City B-80-200-socz-142x64

360° view





Basic parameters

Name	Power	Lumen output	Type	Net weight [kg]
30-200	28 W	3 892 lm	Outdoor	4,5
40-200	38 W	5 282 lm		4,6
50-200	48 W	6 672 lm		4,7
60-200	58 W	8 062 lm		4,8
80-200	78 W	10 842 lm		4,8
100-200	100 W	13 900 lm		5

- Power and lumen output of lamp may hesitate +/- 5% from the table above
- KP-CITY B with different power is possible and we consider each case individually

Version of KP-CITY B is : **name-lens**

Heeling angle regulation

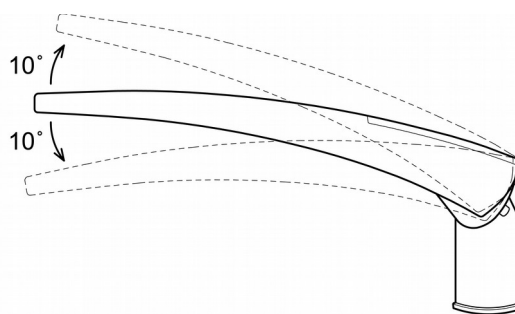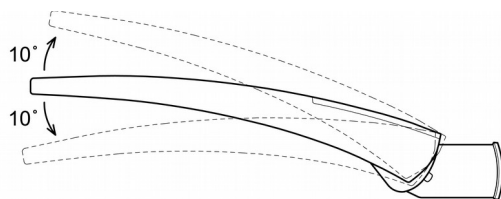


Specification

Input voltage	AC 220 ÷ 240V	
Appliance classes	I	
Working temperature	-30°C ÷ +35°C	
Color rendering index (CRI)	Ra>70	
Color temperature	5000K 4000K other to order	
Life time	> 50 000 hours	
Material	Structure	aluminum die-casting
	Finish	anodized
	Front glass	tempered glass
Color	graphite	
LED Vender	Seoul Semiconductor	
Lamp dimension (length x width x height)[mm]	530 x 250 x 100	
Lamp mount dimension (length x diameter)[mm]	120 x 80	
side-entry mounting diameter [mm]	Ø60	


Maintenance

- replaceable power supplier in the lamp


Lenses

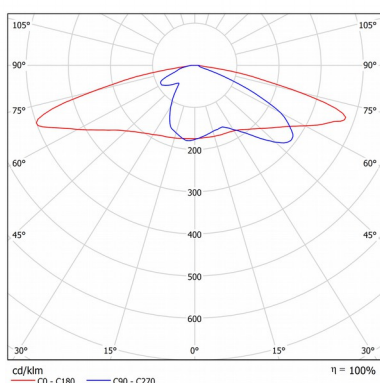


lens: socz-142x64

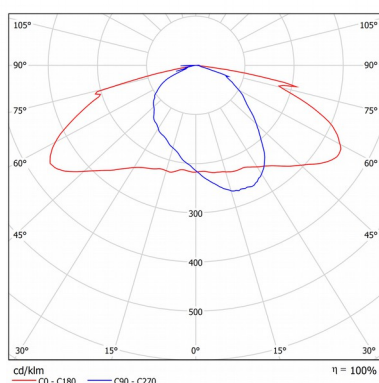


lens: socz-120x60

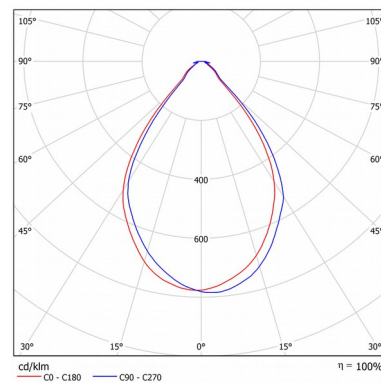

lens: socz-60x60

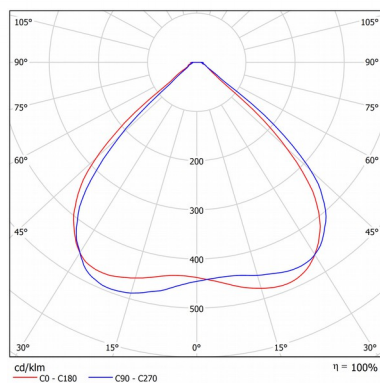

lens: socz-90x90

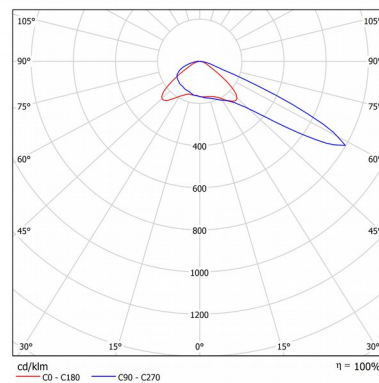

lens: socz-DAL



Version of KP-CITY B is : **name-lens**