



KP-HALA

145 lm/W

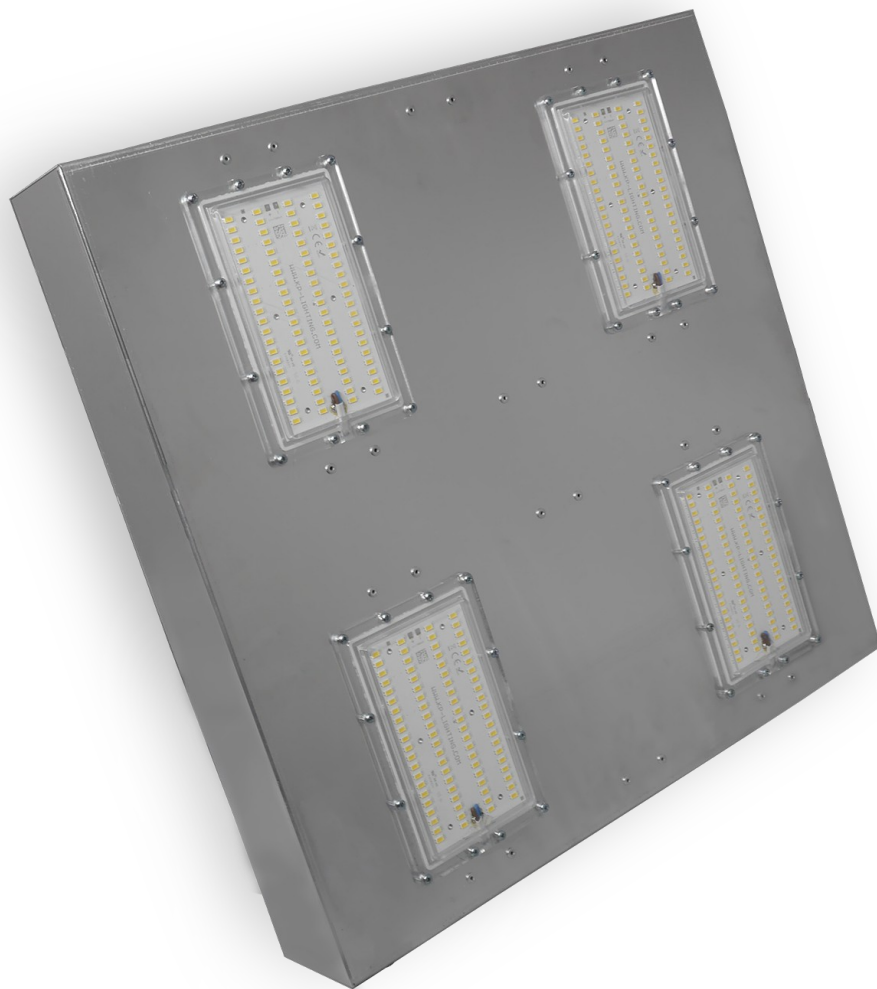


KP-HALA-120-200


Technical drawings (mm)

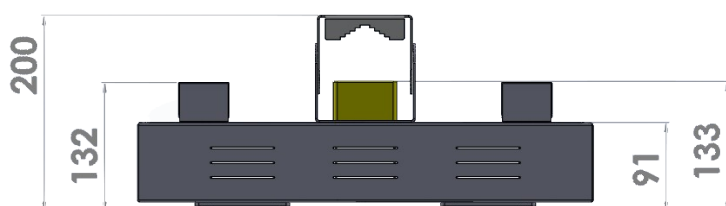



KP-HALA-
120-200

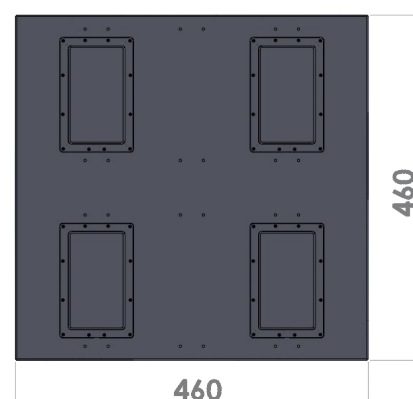

Fixing

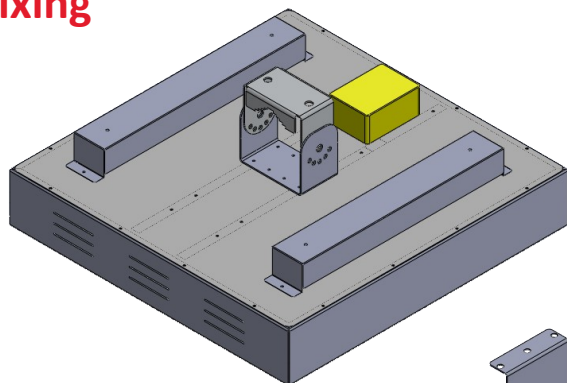

The fixing of the lamp can be individually adjust

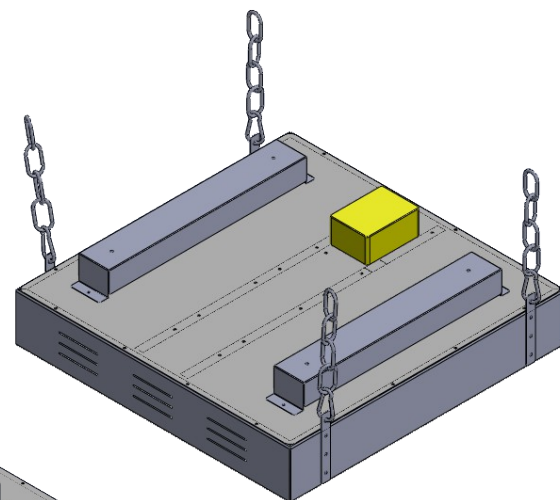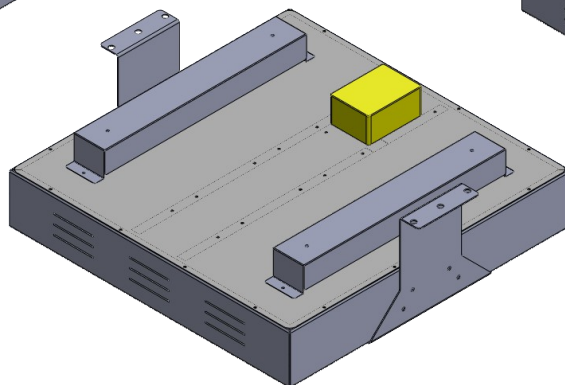

KP-HALA-120-200


Basic parameters

Version	Power	Lumen output	Type	Lamp dimension (length x width x height)[mm]	Net weight [kg]
130-200	125 W	18 125 lm	Indoor / Outdoor	460 x 460 x 133	4
200-200	198 W	28 710 lm		570 x 420 x 128	6,5
400-200	390 W	56 550 lm		776 x 411 x 144	8,5


- Power and lumen output of lamp may hesitate +/- 5% from the table above
- KP-Hala with different power is possible and we consider each case individually

Specification


Input voltage	AC 220 ÷ 240V	
Appliance classes	I	
Working temperature	-20°C ÷ 35°C	
Color rendering index (CRI)	Ra>80	
Life time	> 50 000 hours	
Color temperature	5000K 4000K other to order	
Material	Structure	aluminium build
	Finish	can be anodized
LED Vender	Samsung	

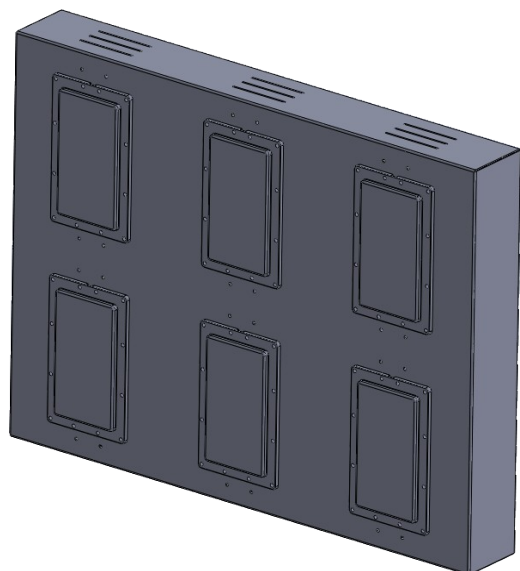



KP-HALA-190-200

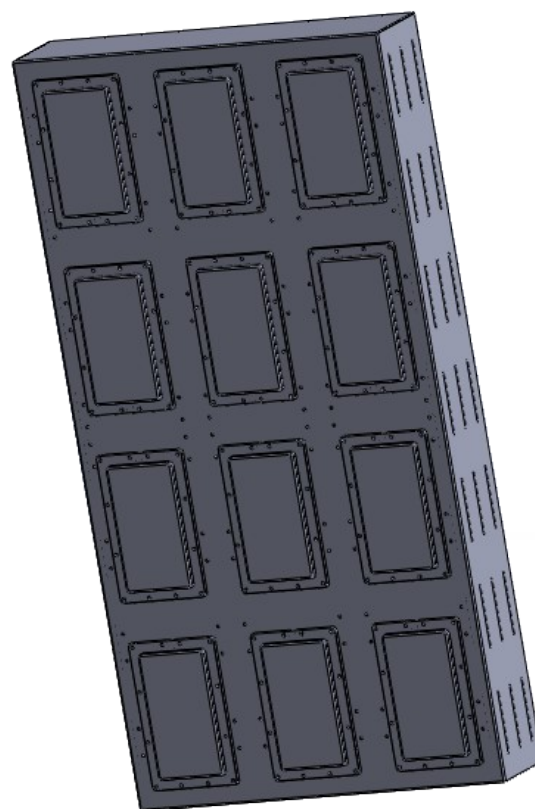

KP-HALA-400-200

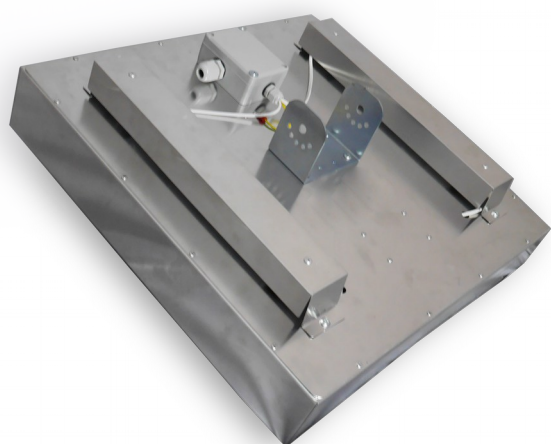

KP-HALA-120-200

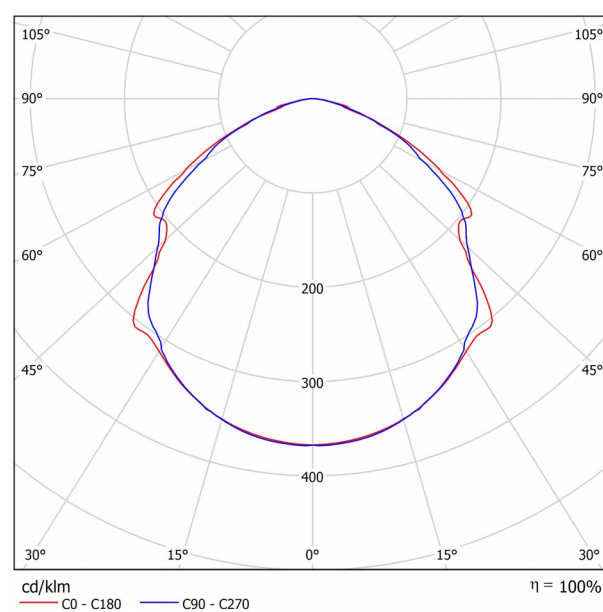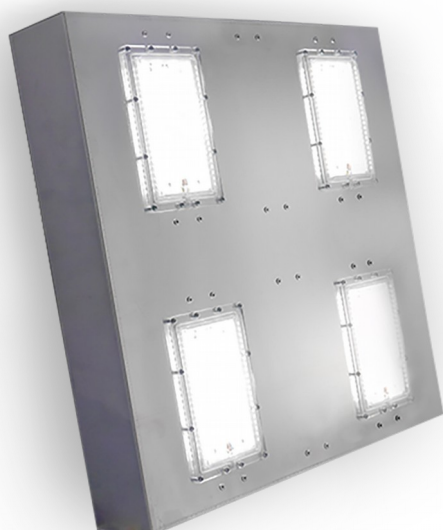

light distribution curve