



KP-KASETON 60x60 STANDARD

120 lm/W

Instant on/off
Modern design

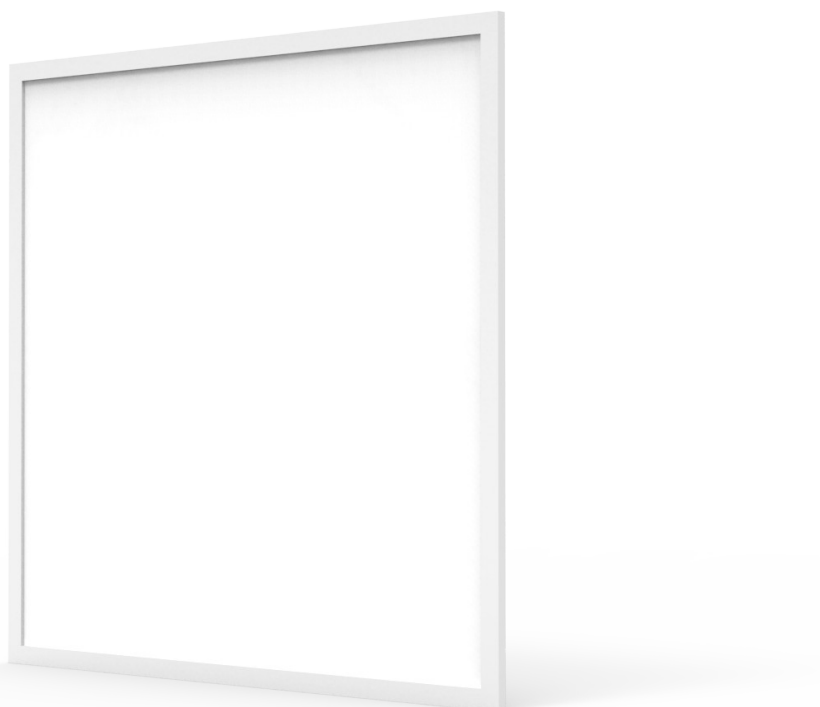

Technical drawings (mm)

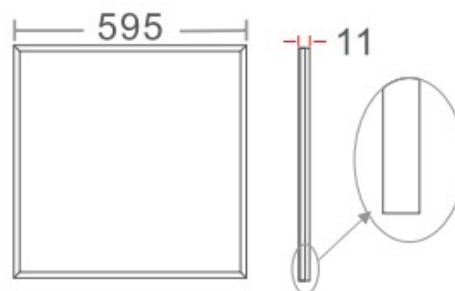

The product visually may slightly differ from the one presented above

Basic parameters

Version	Power	Lumen output	Net weight [kg]
30-200	29 W	3 480 lm	1,2
35-200	36 W	4 320 lm	
40-200	45 W	5 400 lm	

- Power and lumen output of lamp may hesitate +/- 5% from the table above

Specification

Input voltage AC 220 ÷ 240V

Appliance classes II

Working temperature 0°C ÷ 35°C

Color rendering index (CRI) Ra>80

Life time > 50 000 hours

Color temperature 3000K | 4000K | 6000K

Lamp dimension (length x width x height)[mm] 595 x 595 x 11

UGR standard



Structure extruded aluminum

Material Finish powder coated

Diffuser milky PS

Color white

LED Vender Epistar

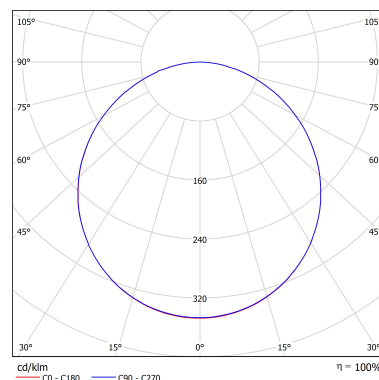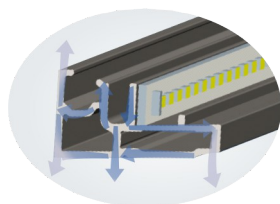

light distribution curve
for standard UGR