

KP-LINEA


130 lm/W




Technical drawings (mm)




KP-LINEA-
32-200 1,6m



KP-LINEA-
X2-64-200 1,6m



Fixing

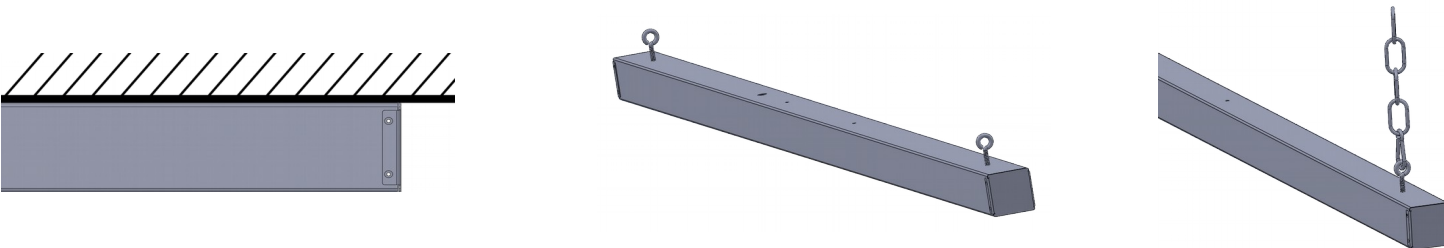

The fixing of the lamp can be individually adjust



The ability to join lamps


Basic parameters

Version	Power	Lumen output	Type	Lamp dimension (length x width x height)[mm]	Net weight [kg]
8-200 0,4m	8 W	1 040 lm	Indoor	393 x 51 x 50	0,8
16-200 0,8m	16 W	2 080 lm		763 x 51 x 50	1,2
24-200 1,2m	24 W	3 120 lm		1133 x 51 x 50	1,5
32-200 1,6m	32 W	4 160 lm		1503 x 51 x 50	1,8
40-200 2m	40 W	5 200 lm		1873 x 51 x 50	2,8
X2-16-200 0,4m	16 W	2 080 lm	Indoor	393 x 96 x 50	1
X2-32-200 0,8m	32 W	4 160 lm		763 x 96 x 50	1,5
X2-48-200 1,2m	48 W	6 240 lm		1133 x 96 x 50	1,8
X2-64-200 1,6m	64 W	8 320 lm		1503 x 96 x 50	2,2
X2-80-200 2m	80 W	10 400 lm		1873 x 96 x 50	3,4

- Power and lumen output of lamp may hesitate +/- 5% from the table above
- KP-LINEA with different power is possible and we consider each case individually

Specification

Input voltage		AC 220 ÷ 240V
Appliance classes		I
Working temperature		-10°C ÷ 35°C
Color rendering index (CRI)		Ra>80
Life time		> 50 000 hours
Color temperature		5000K 4000K other to order
Material	Structure	aluminium build
	Finish	varnished [black as standard]
	Diffuser	PMMA
LED Vender		Samsung

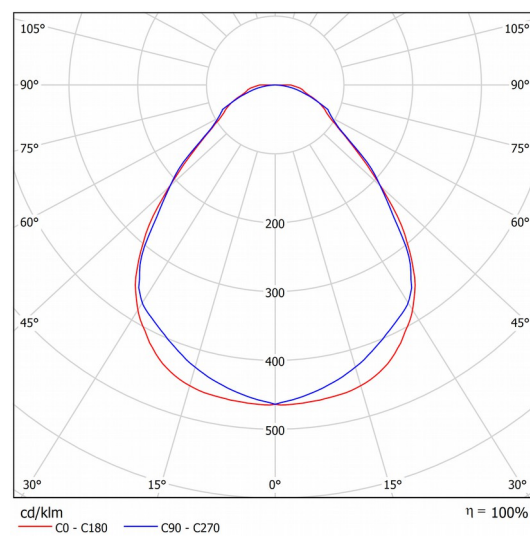

light distribution curve