


KP-PRIM


140 lm/W




KP-PRIM-
30-200

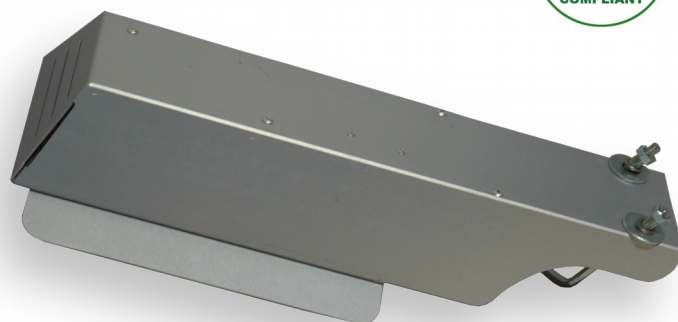


Technical drawings (mm)

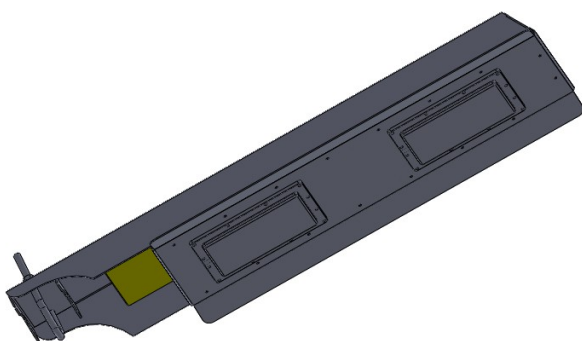


KP-PRIM-60-200

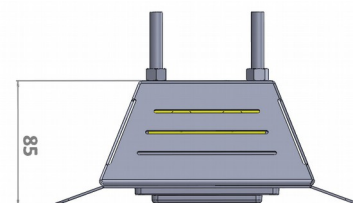

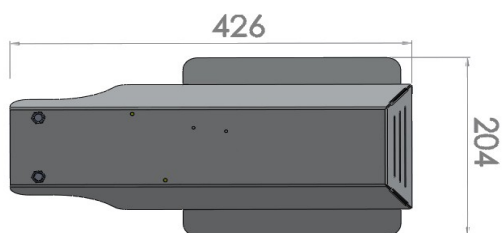

KP-PRIM-
30-200

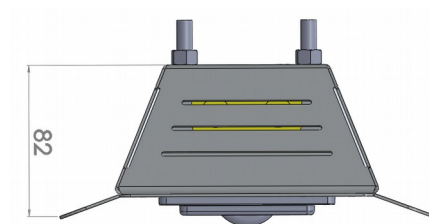


Basic parameters

Version	Power	Lumen output	Type	Lamp dimension (length x width x height)[mm]	Net weight [kg]
20-200	19 W	2 660 lm	Outdoor	426 x 204 x 82	2
30-200	35 W	4 900 lm		426 x 204 x 82	2
60-200	65 W	9 100 lm		709 x 204 x 85	3

- Power and lumen output of lamp may hesitate +/- 5% from the table above
- KP-PRIM with different power is possible and we consider each case individually

Specification

Input voltage	AC 220 ÷ 240V	
Appliance classes	I	
Working temperature	-20°C ÷ 35°C	
Color rendering index (CRI)	Ra>80	
Life time	> 50 000 hours	
Color temperature	5000K 4000K other to order	
Material	Structure	aluminium build
	Finish	anodized
LED Vender	Samsung	
side-entry mounting diameter [mm]	Ø60	



light distribution curve