


KP-ROKA

148 lm/W




KP-ROKA-
320-200-socz-90x90s


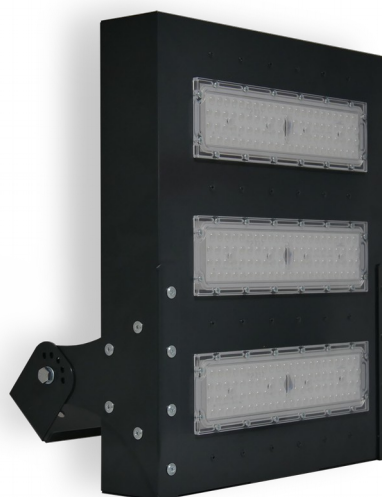


KP-ROKA-
120-200-socz-90x90s


Technical drawings (mm)




KP-ROKA-120-200

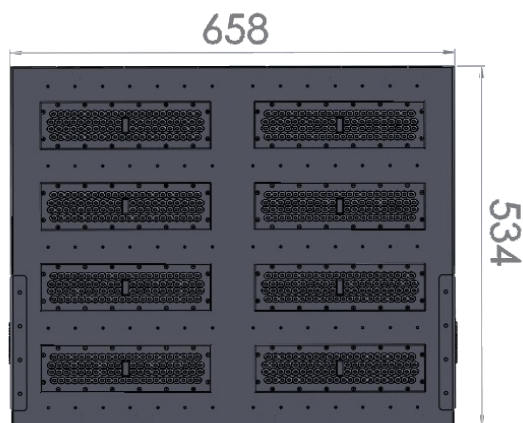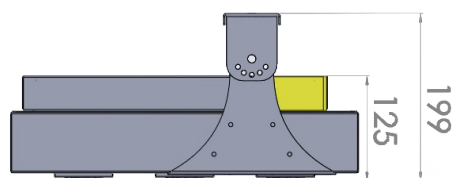

KP-ROKA-320-200

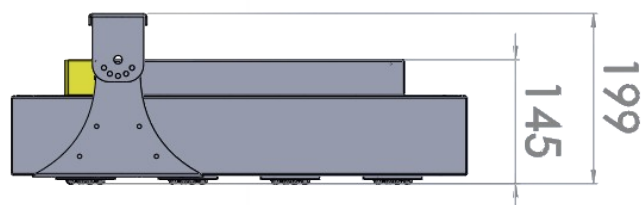

Fixing

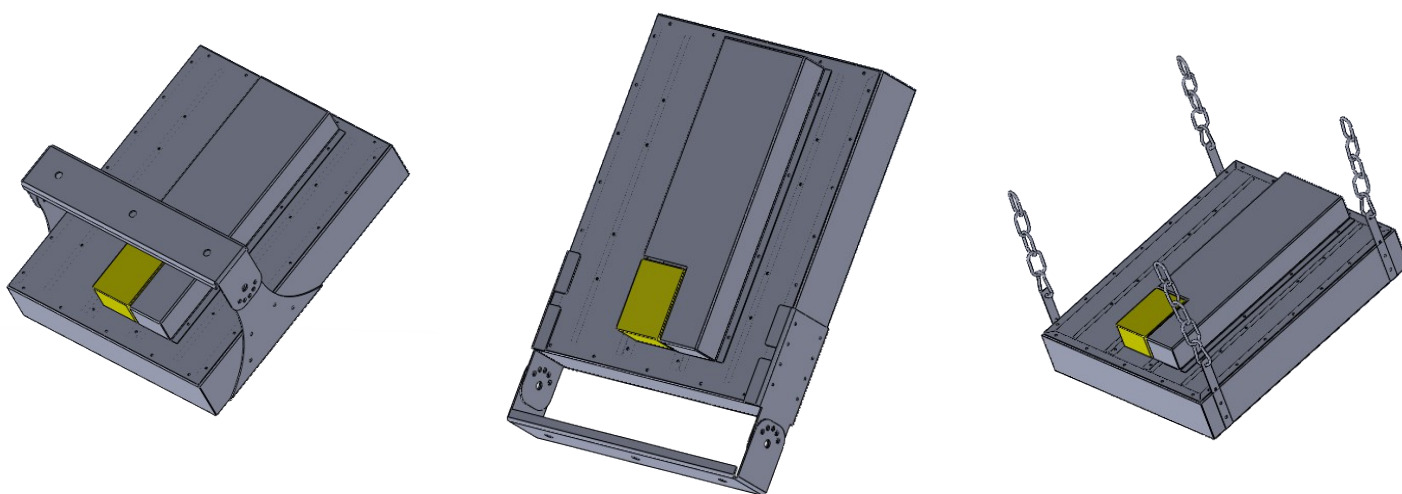

The fixing of the lamp can be individually adjust

Basic parameters

Name	Power	Lumen output	Type	Lamp dimension (length x width x height)[mm]	Net weight [kg]
80-200	80 W	11 840 lm	Outdoor	337 x 294 x 125	3,5
120-200	120 W	17 760 lm		337 x 414 x 125	4,5
160-200	160 W	23 680 lm		337 x 534 x 125	5
200-200	200 W	29 600 lm		337 x 654 x 125	5,5
240-200	240 W	35 520 lm		658 x 414 x 145	7
320-200	320 W	47 360 lm		658 x 534 x 145	8,5
400-200	400 W	59 200 lm		658 x 654 x 145	9,5

- Power and lumen output of lamp may hesitate +/- 5% from the table above
- KP-ROKA with different power is possible and we consider each case individually

Version of KP-ROKA is : **name-lens**

Specification

Input voltage		AC 220 ÷ 240V
Appliance classes		I
Working temperature		-30°C ÷ 35°C
Color rendering index (CRI)		Ra>80
Color temperature		5000K 4000K other to order
Material	Structure	aluminium build
	Finish	anodized can be varnished
LED Vender		Samsung
Life time		> 50 000 hours




KP-ROKA-320-200




KP-ROKA-120-200


Lenses

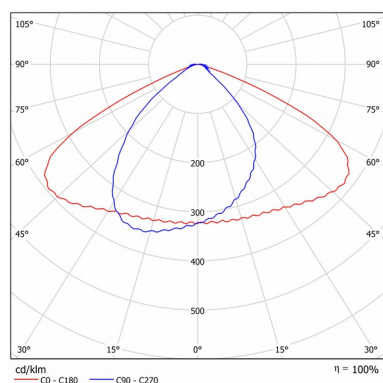


lens: socz-136x78s

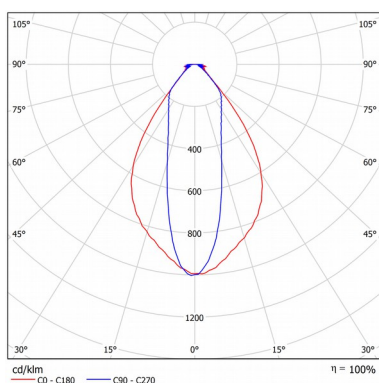

lens: socz-30x70s

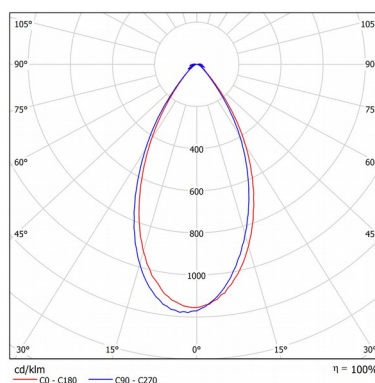


lens: socz-60x60s

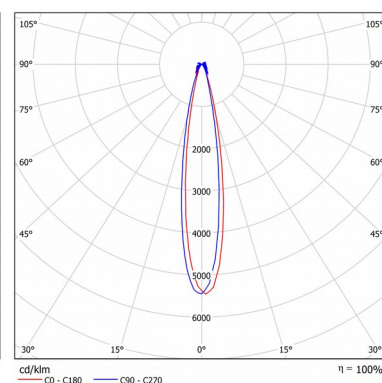


lens: socz-15s


Version of KP-ROKA
is : **name-lens**

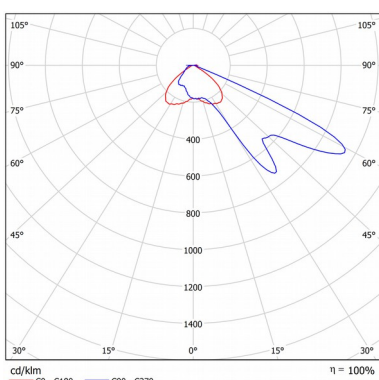

lens: socz-49x21s

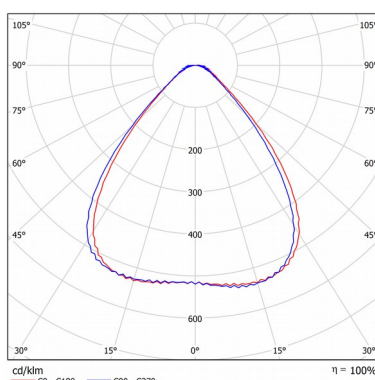

lens: socz-90x90s

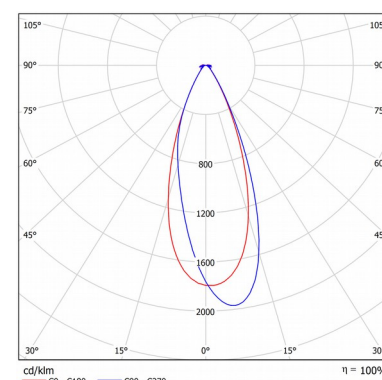

lens: socz-40s