

KP-SLIM

130 lm/W




Technical drawings (mm)


1622




KP-SLIM-32-200 1,6m



Fixing

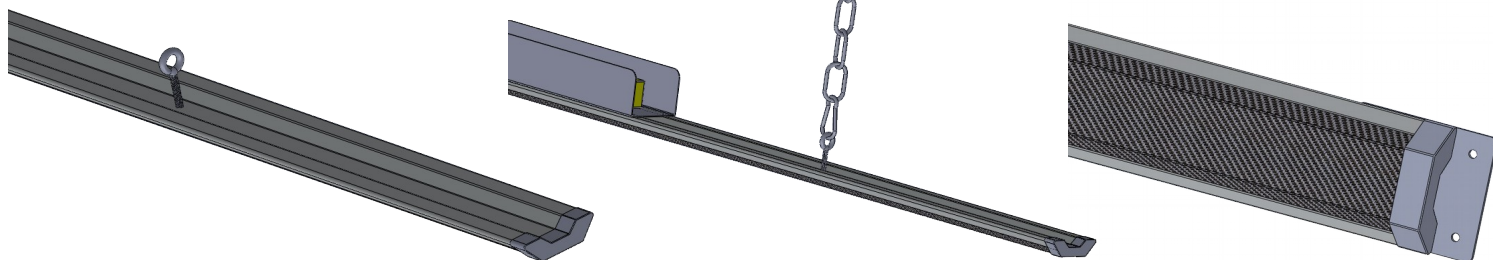

The fixing of the lamp can be individually adjust

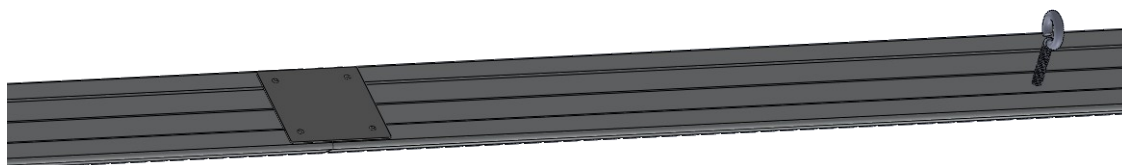


The ability to join lamps

PMMA Diffuser (please choose when ordering)



"TRAPEZIUM" diffuser

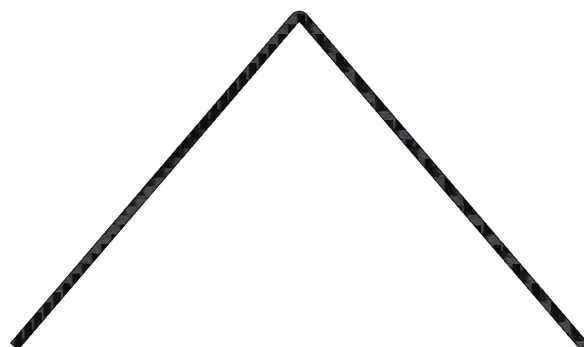

"TRIANGLE" diffuser


Basic parameters

Version	Power	Lumen output	Type	Lamp dimension [mm]			Net weight [kg]
				length	width x height for „TRAPEZIUM” diffuser	width x height for „TRIANGLE” diffuser	
10-200 0,4m	9 W	1 170 lm	Indoor	422	61 x 19	61 x 39	0,5
20-200 0,8m	18 W	2 340 lm		822			0,8
30-200 1,2m	27 W	3 510 lm		1222			1
40-200 1,6m	36 W	4 680 lm		1622			1,2
45-200 2m	45 W	5 850 lm		2022			1,5

- Power and lumen output of lamp may hesitate +/- 5% from the table above
- KP-SLIM with different power is possible and we consider each case individually

Specification

Input voltage	AC 220 ÷ 240V
Appliance classes	I
Working temperature	-10°C ÷ 35°C
Color rendering index (CRI)	Ra>80
Life time	> 50 000 hours
Color temperature	5000K 4000K other to order
Material	Structure aluminium build
	Finish varnished [white as standard]
	Diffuser PMMA
LED Vender	Samsung

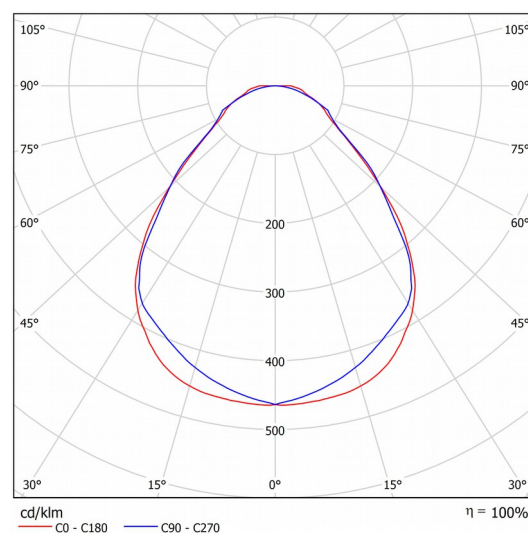

light distribution curve