

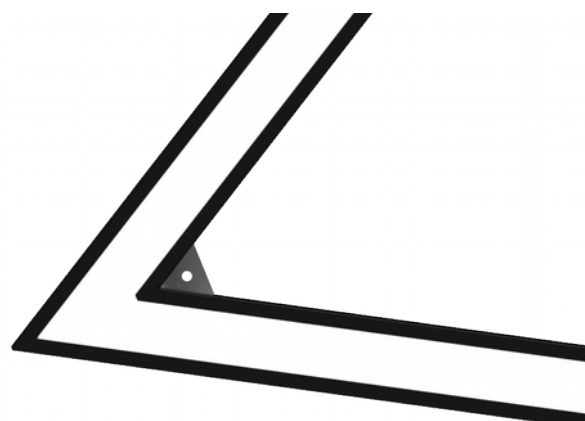
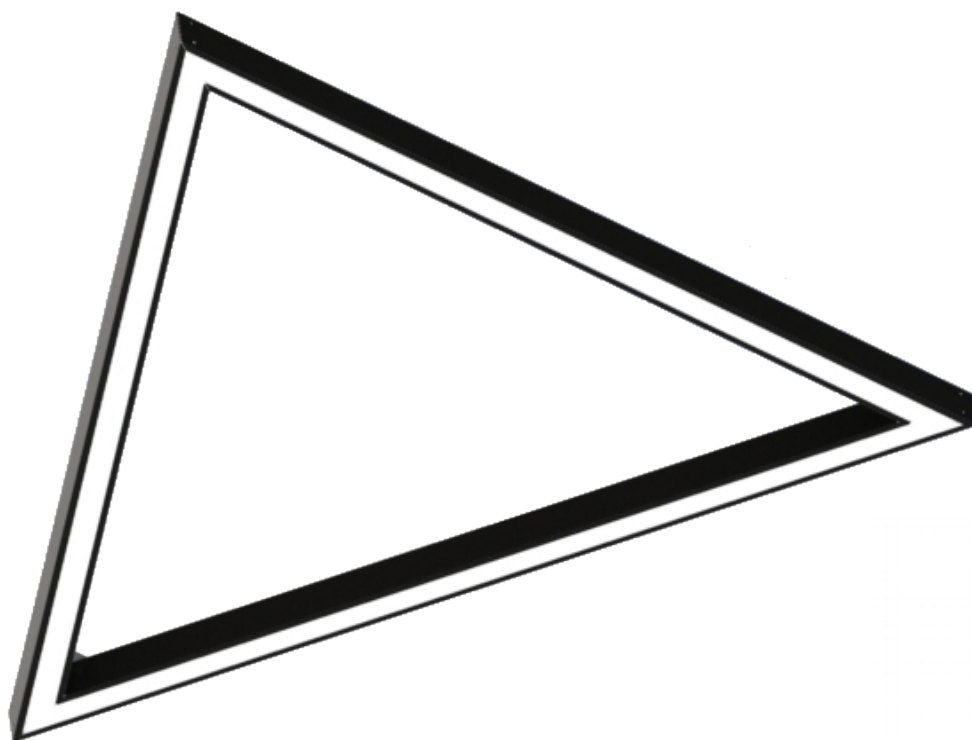


## KP-TREK3


110 lm/W

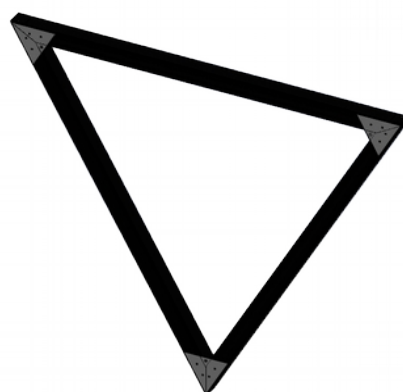

### Technical drawings (mm)

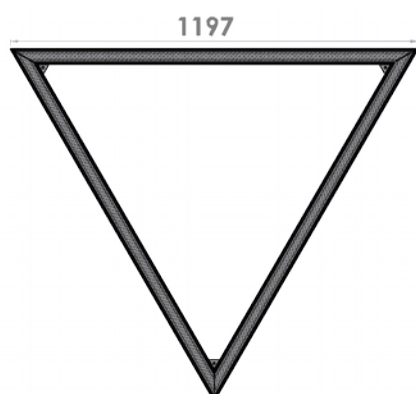

KP-TREK3 80-200



## Fixing



The fixing of the lamp can be individually adjust

## Basic parameters

| Name   | Power | Lumen output | Type   | The length of outer side of the triangle[mm] | Net weight [kg] |
|--------|-------|--------------|--------|----------------------------------------------|-----------------|
| 40-200 | 48 W  | 5 280 lm     | Indoor | 798                                          | 4               |
| 80-200 | 72 W  | 7 920 lm     |        | 1197                                         | 6               |

- Power and lumen output of lamp may hesitate +/- 5% from the table above
- KP-TREK3 with different power is possible and we consider each case individually

## Specification

|                             |           |                                |
|-----------------------------|-----------|--------------------------------|
| Input voltage               |           | AC 220 ÷ 240V                  |
| Appliance classes           |           | I                              |
| Working temperature         |           | -10°C ÷ 35°C                   |
| Color rendering index (CRI) |           | Ra>80                          |
| Life time                   |           | > 50 000 hours                 |
| Color temperature           |           | 5000K   4000K   other to order |
| Material                    | Structure | aluminium build                |
|                             | Finish    | varnished [black as standard]  |
| LED Vender                  |           | Samsung                        |
| Dimming                     |           | optional ( 0-10V , DALI )      |