




KP-VADE

148 lm/W

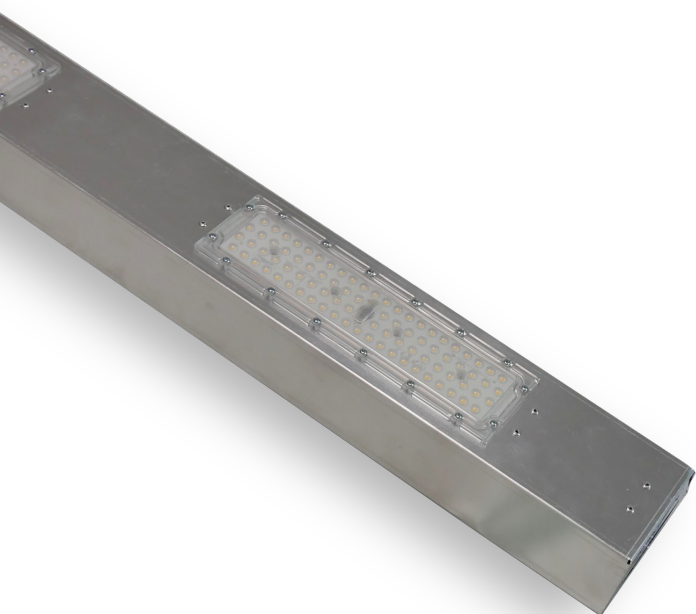


KP-VADE-
150-200-socz-90x90

Technical drawings (mm)

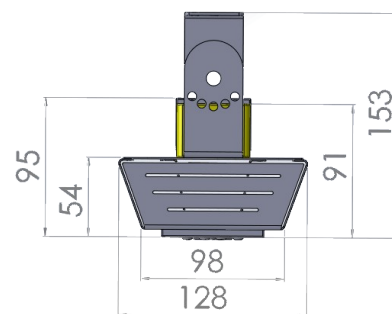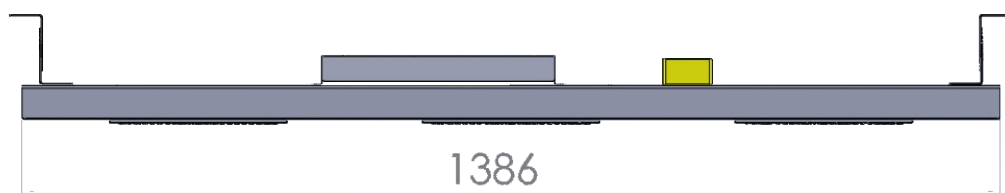

KP-VADE-150-200-socz-90x90

Fixing

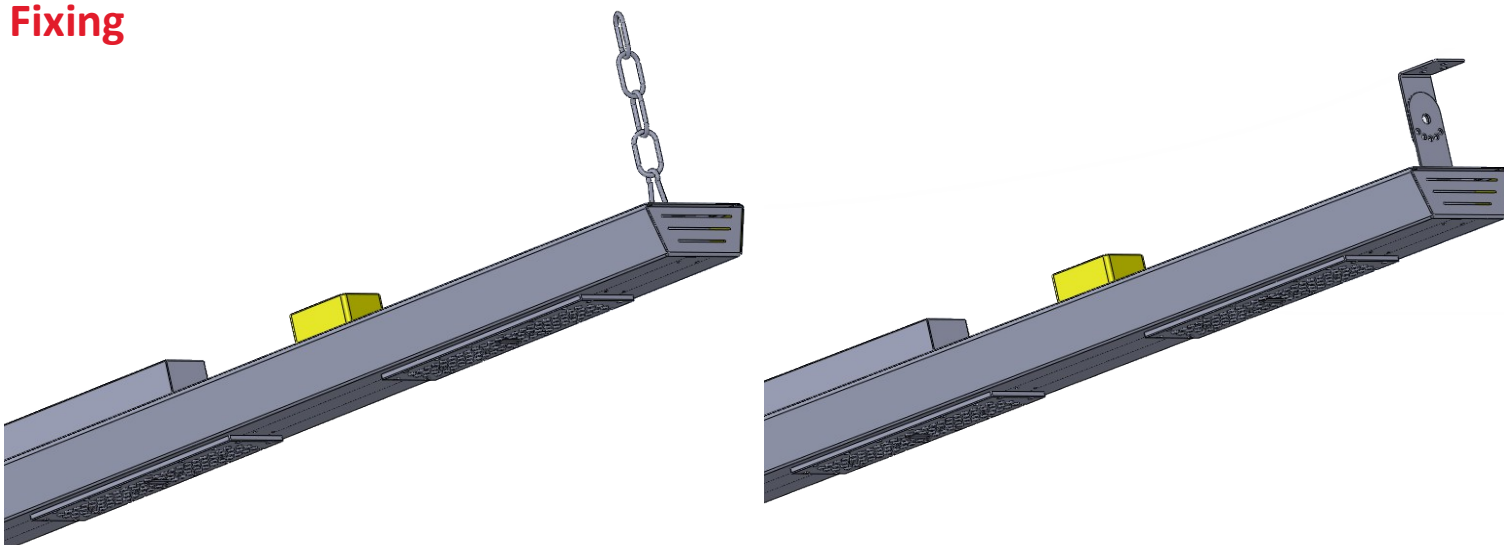


The fixing of the lamp can be individually adjust

Basic parameters


Name	Power	Lumen output	Type	Lamp dimension (length x width x height)[mm]	Net weight [kg]
200-200	200 W	29 600 lm	Indoor / Outdoor	1830 x 128 x 95	4,5
150-200	150 W	22 200 lm		1386 x 128 x 95	3,5
100-200	100 W	14 800 lm		943 x 128 x 95	2,5
50-200	50 W	7 400 lm		700 x 128 x 95	1,5

- Power and lumen output of lamp may hesitate +/- 5% from the table above
- KP-VADE with different power is possible and we consider each case individually

Version of KP-VADE is : **name-lens**

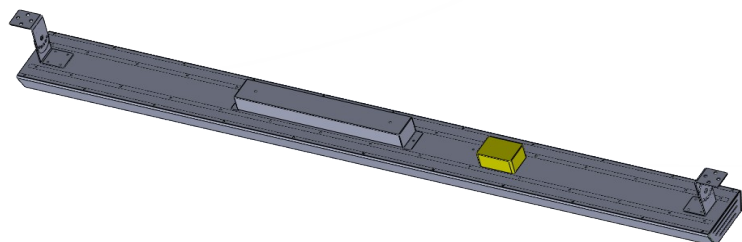


KP-VADE-
150-200

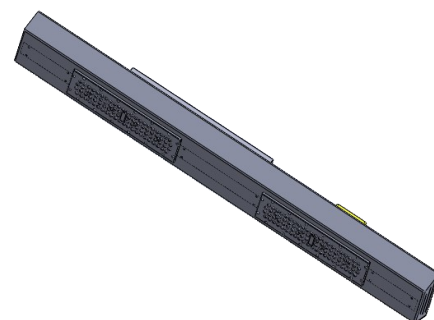

KP-VADE-
100-200


KP-VADE-
200-200

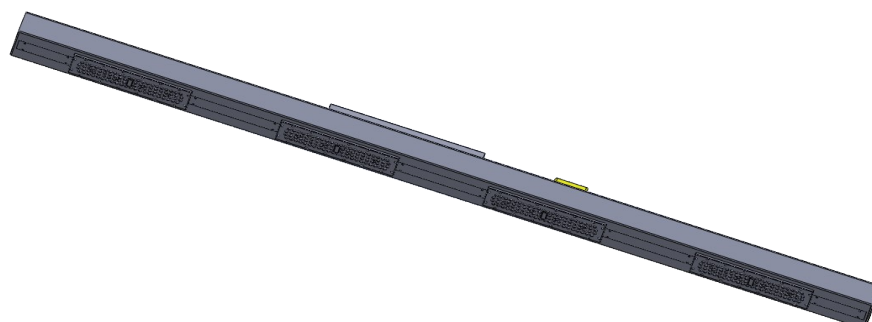


Specification

Input voltage	AC 220 ÷ 240V	
Appliance classes	I	
Working temperature	-30°C ÷ 35°C	
Color rendering index (CRI)	Ra>80	
Life time	> 50 000 hours	
Color temperature	5000K 4000K other to order	
Material	Structure	aluminium build
	Finish	anodized
LED Vender	Samsung	


Lenses

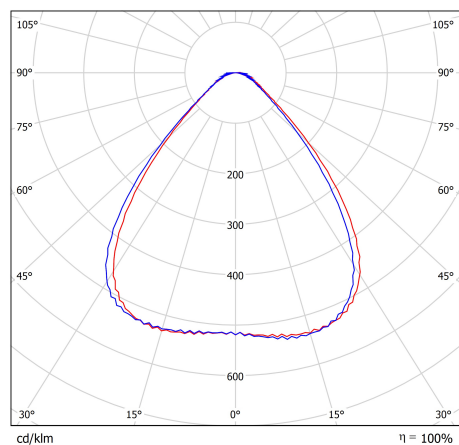

lens: socz-90x90


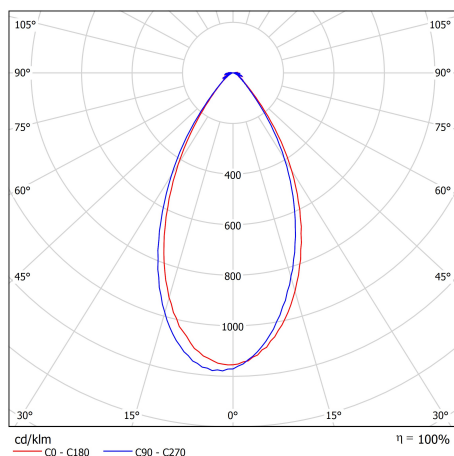


lens: socz-60x60

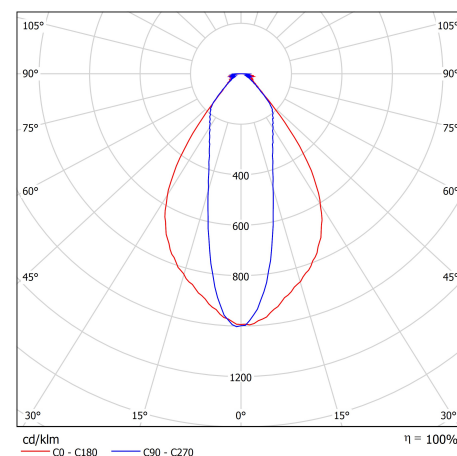

lens: socz-30x70

Version of KP-VADE is : **name-lens**

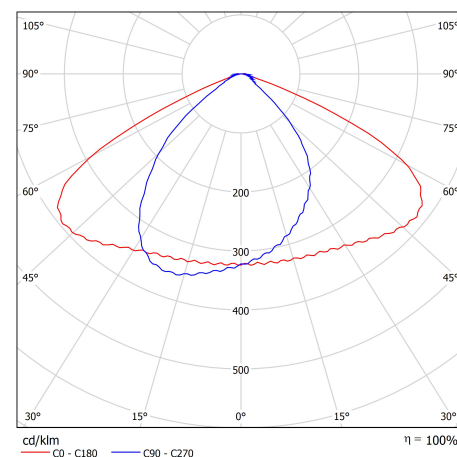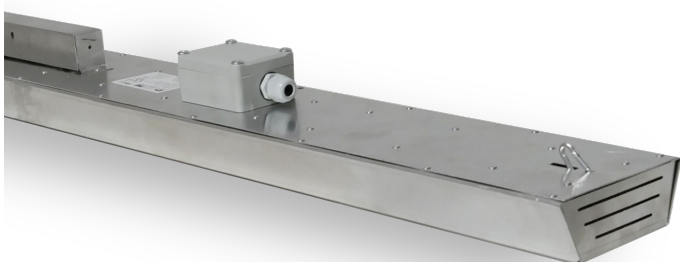

lens: socz-136x78