




KP-WIATA-RAMKA

145 lm/W








KP-WIATA-RAMKA 60-200

Technical drawings (mm)

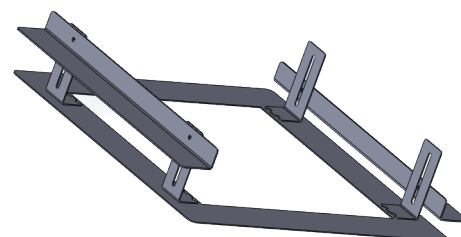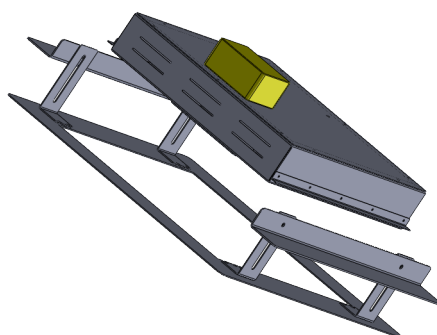
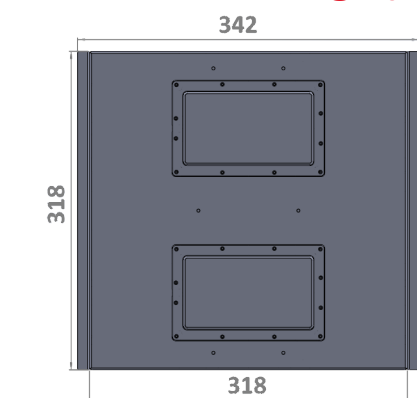


KP-WIATA-RAMKA 60-200

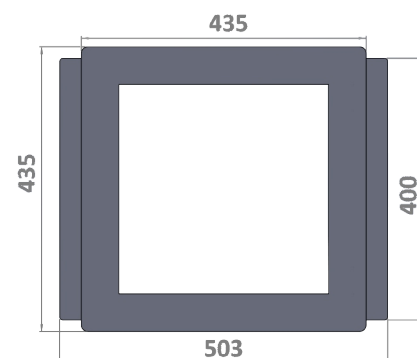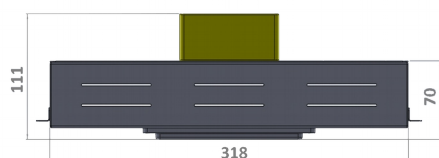

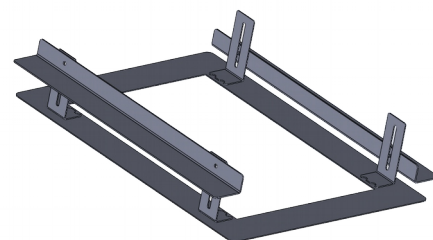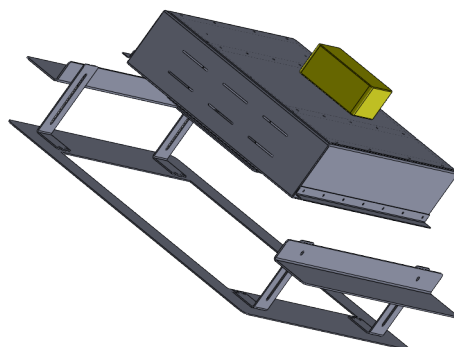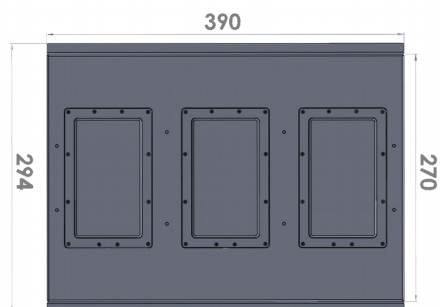


KP-WIATA-RAMKA 90-200

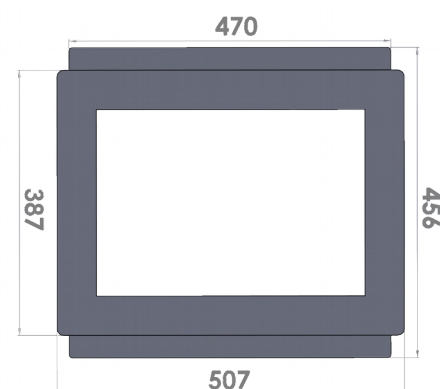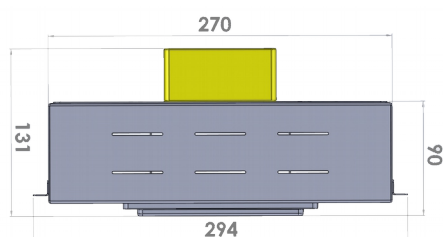


Basic parameters

Version	Power	Lumen output	Type	Lamp dimension (length x width x height)[mm]	Net weight [kg]
60-200	65 W	9 425 lm	Indoor / Outdoor	435 x 435 x 111	3
90-200	95 W	13 775 lm		507 x 387 x 131	3,6

- Power and lumen output of lamp may hesitate +/- 5% from the table above
- KP-WIATA-RAMKA with different power is possible and we consider each case individually

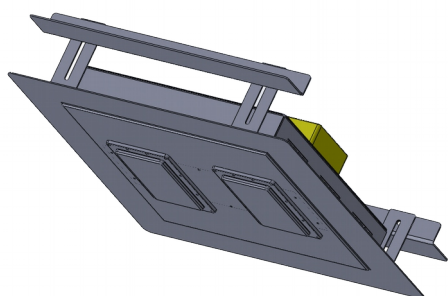


KP-WIATA-RAMKA 60-200

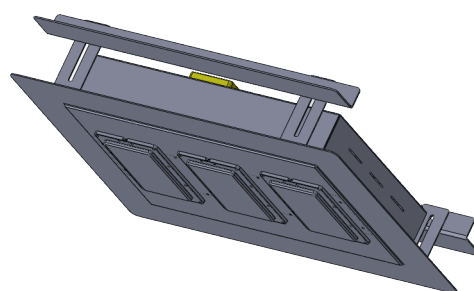

KP-WIATA-RAMKA 90-200

Specification

Input voltage	AC 220 ÷ 240V	
Appliance classes	I	
Working temperature	-20°C ÷ 35°C	
Color rendering index (CRI)	Ra>80	
Life time	> 50 000 hours	
Color temperature	5000K 4000K other to order	
Material	Structure	aluminium build
	Finish	Base body can be anodized or varnished frame varnished [white as standard]
LED Vender	Samsung	

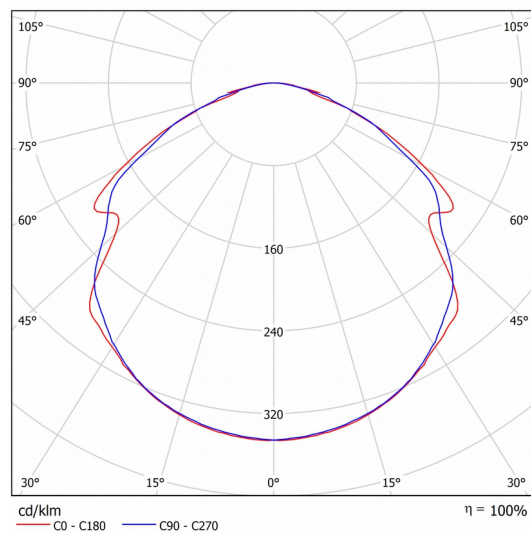

light distribution curve